


TOP TIPS

Ensure you follow our guidelines to achieve patio success


View as large an area of your chosen paving as possible before purchasing to ensure you are happy with your choice.

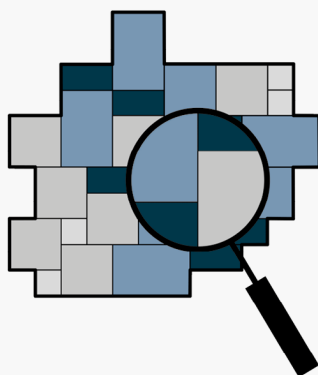


Inspect your product to make sure you are completely happy before you lay. We advise that dry laying products before laying them permanently is the ideal way to do this.



Always lay paving on a full bed of mortar and **never** use the spot bed method - see our step by step laying guides for more advice on this.

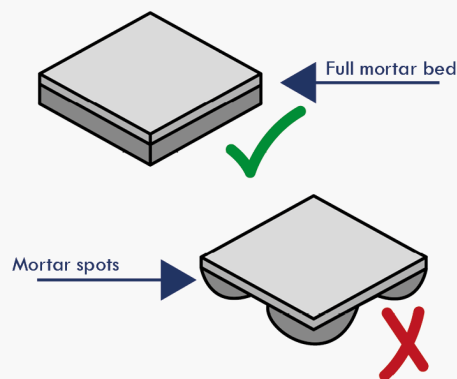


Never butt joint paving when laying - you should always use an appropriate joint for your chosen product. Buildland products should be laid with a minimum 10mm joint.

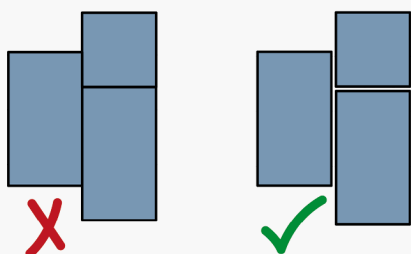

Always use a neat SBR bonding agent on the back of natural stone, and always use a slurry primer on the back of porcelain tiles.



Always mix packs whilst laying to achieve an overall blended appearance.

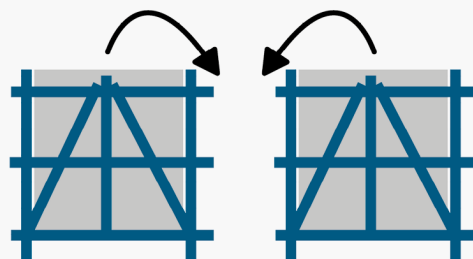

Never use brick acid or acidic cleaning products on natural stone. Always check that cleaning products are suitable for use on porcelain.



Ask your Buildland stockist for advice on sealants and joining compounds.

