



Image not found or type unknown


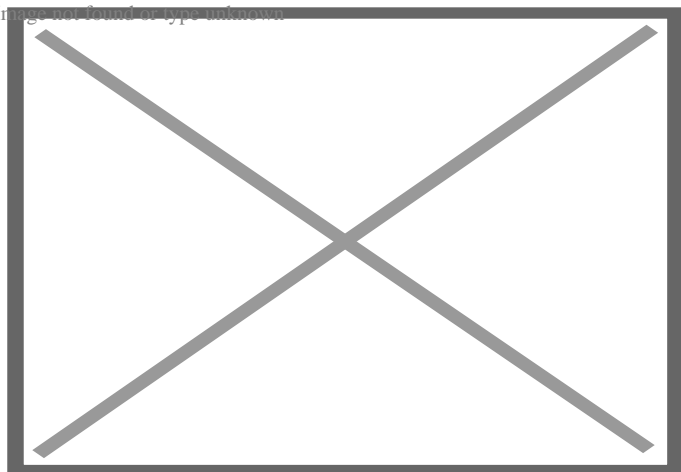


Image not found or type unknown

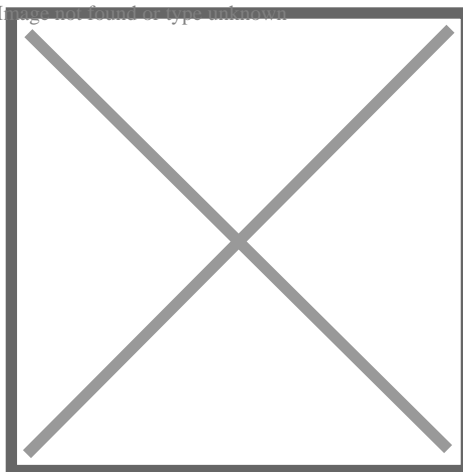

### Product Information

Ibstock Code:	2613
Type:	Waterstruck
Facing Description:	Distressed
Dry Brick Weight (kg):	2.6kg
Pack Quantity:	392
Packaging (standard):	Banded (plastic) And Shrinkwrapped
Factory:	Birtley

### Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	Tm Rm
Configuration:	Solid
Voids (%):	0
Compressive Strength (N/mm <sup>2</sup> ):	20
Active Soluble Salts:	S2
Water Absorption (% weight):	12
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m <sup>3</sup> ):	1500
Equivalent Thermal Conductivity "K" value 5% Exposed:	Refer to Ibstock
Initial Rate of Absorption (Suction Rate) (Kg/m <sup>2</sup> /min):	Refer to Ibstock
EAN:	5036335015056